



TETHER FITTING INSTRUCTIONS

FRANNA AT-20 series

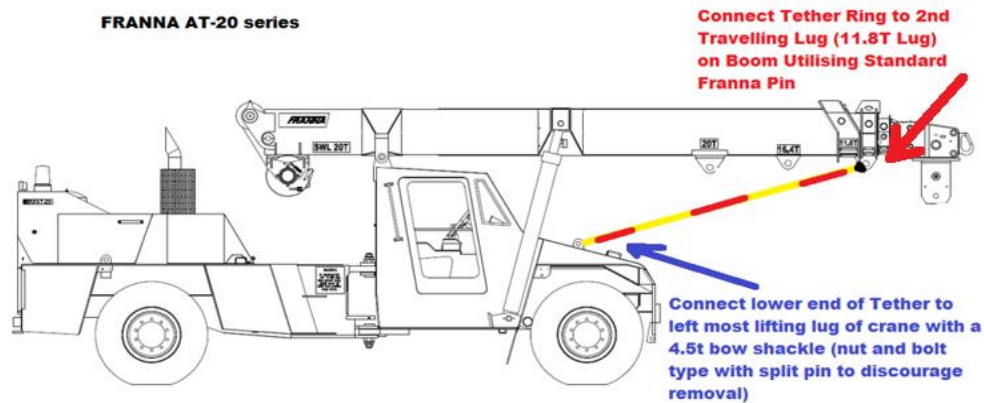

FRANNA MAC-25 series

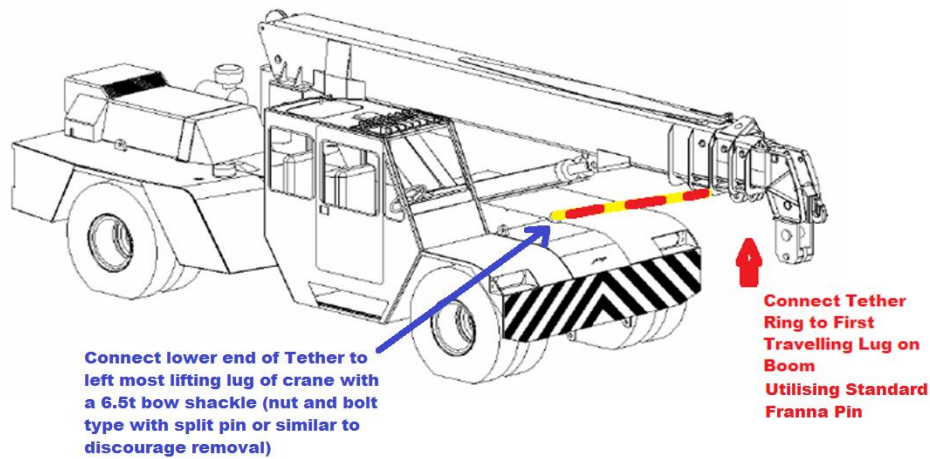

TIDD PC-25



Please note: this tether must be kept clean and in good order at all times. It is strongly suggested that the tether be fitted as per the instructions with a bow shackle with the nut and bolt and split pin are used to discourage removal of the tether so that it is always there when travelling through a tunnel. This tether has been developed to allow the boom to be elevated no more than a maximum of approx' 5 degrees.

Please instruct your personnel/crane crews to use the Tether correctly and at ALL times when travelling through the tunnels as required by the NSW RMS.

The CICA NSW Developed Tether is NSW RMS and Centre of Road Safety Compliant when used correctly.