



TETHER FITTING INSTRUCTIONS

FRANNA AT-20 series

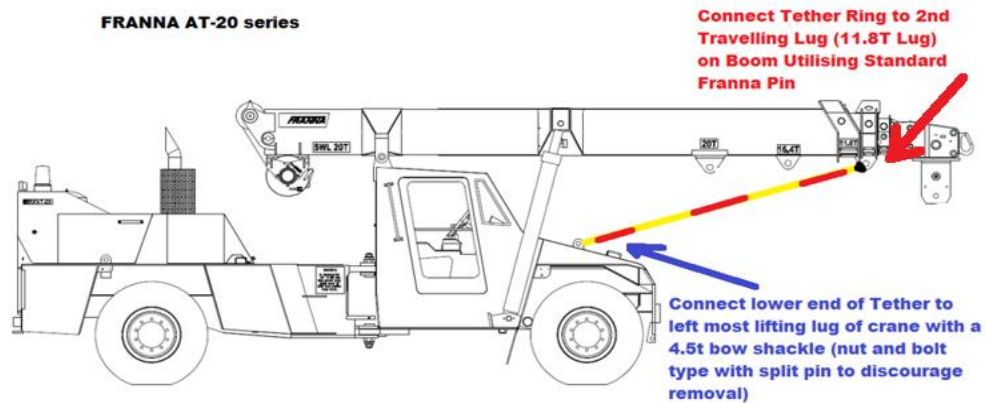

FRANNA MAC-25 series

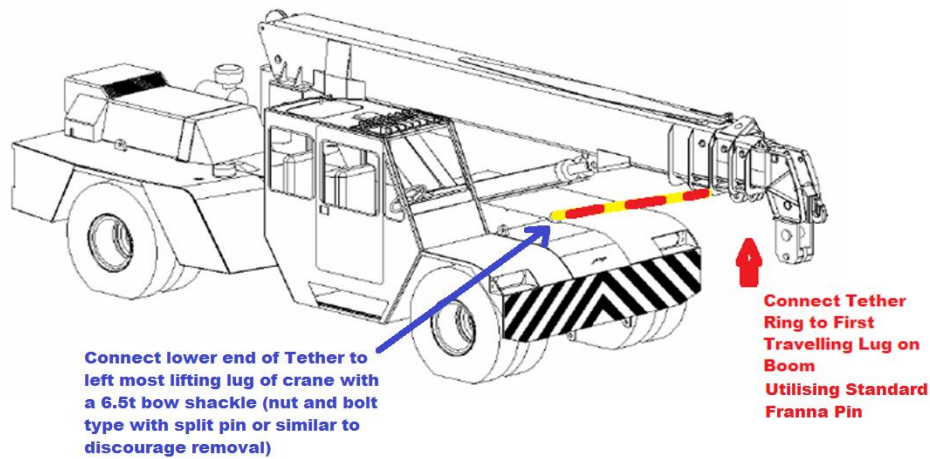

TIDD PC-25



Please note: this tether must be kept clean and in good order at all times. It is strongly suggested that the tether be fitted as per the instructions with a bow shackle with the nut and bolt and split pin are used to discourage removal of the tether so that it is always there when travelling through a tunnel. This tether has been developed to allow the boom to be elevated no more than a maximum of approx' 5 degrees.

Please instruct your personnel/crane crews to use the Tether correctly and at ALL times when travelling through the tunnels as required by TMR.

The CICA developed Tether is TMR compliant when used correctly.